

Fire Products

Catalogue

ISSUE 01

The background of the cover is a vibrant red with a gradient effect. It features several glowing, white-to-red light trails that curve and flow across the lower half of the image, creating a sense of motion and energy. The top half is a solid dark red, providing a high-contrast background for the white and light red text.

Contents

Section 1 Fire Fighting Equipment

5-8	PowerX
9-14	FirePower
15-18	Gloria
19-20	Hose reels & spares
20-22	Wheeled extinguishers & spares
23-24	Fire blankets & aerosol / automatic extinguishers

Section 2 Equipment Protection

27-28	TG Range: Stands
28	TG Range: Cabinets
28	TG Range: Backboards
29	TG Range: Tubed range & packages
30-31	Jonesco Range: Cabinets
32	Jonesco Range: FireKart
32	Jonesco Range: Stands
33-35	Mobile fire points / contractor stand
35	Contractors stand package
35	Fire buckets
36	Document cabinets & pouch
36	Fire log books & holders
36	Theft stoppers

Section 3 Safety Signs

40	ID signs
40	Fire fighting equipment
41	Projecting sign
41	General fire
42	Fire action notices
43	Emergency escape
44	Mandatory
44	Prohibition
45	Silicon adhesive & applicator gun
46	Safety posters

Section 4 Means Of Escape

49	Redlam panic bolts
49	Key boxes & spares
50	Escape ladder
50	Rotary hand bell
50	Evacuation chair
51	Agrippa door holders & closers
52	Emergency gas horn & protection box and fixings
53	Lifefammer
53	Fire triangle
53	Fire door seal
53	Exit stopper
54	Door hardware

Fire Fighting Equipment

Extinguishers

Hose reels

Wheeled extinguishers

Fire blankets

Aerosol / automatic extinguishers

1

In this section



5- 8
PowerX



9- 14
FirePower



15- 18
Gloria



19- 20
Hose reels &
spares



20- 22
Wheeled extinguishers
& spares



23- 24
Fire blankets & aerosol /
automatic extinguishers

PowerX

Water extinguishers with additive

Stored pressure

- Kitemarked to BS EN3
- High quality product
- Complete with wall bracket
- Nickel plated brass valve assembly
- Coated steel levers
- Polyester external coating
- Easy gauge testing (with needle test)
- Approved to the Pressure Equipment Directive
- Inclusive of pressure release valve
- 5 year warranty

Type	Water Additive SP	Water Additive P
Capacity (ltr)	3	6
Fire Rating	13A	21A
Height (mm)	430mm	553mm
Cylinder Diameter (mm)	140mm	162mm
Overall Width (mm)	210mm	224mm
Filled Weight (kg)	5.5	9.5
Range of Throw (m)	>2	>6
Duration of Discharge (secs)	>9	>9
Working Pressure (at 20°C)	12Bar	12Bar
Temperature Range (°C)	+5/+60	+5/+60
BS EN3 Approved	YES	YES
MED Approved	N/A	N/A
35KV	YES	YES
Pressure Relief Valve	YES	YES
Low Freeze Additive	NO	NO
Part Number	81/03402	81/03403
Model Number	WA3	WA6



PowerX

Water extinguishers

Stored pressure

- Kitemarked to BS EN3
- High quality product
- Complete with wall bracket
- Nickel plated brass valve assembly
- Coated steel levers
- Polyester external coating
- Easy gauge testing (with needle test)
- Approved to the Pressure Equipment Directive
- Inclusive of pressure release valve
- 5 year warranty

Type	Water SP	Water Spray SP
Capacity (ltr)	9	6
Fire Rating	13A	13A
Height (mm)	620	550
Cylinder Diameter (mm)	184	162
Overall Width (mm)	240	225
Filled Weight (kg)	13.9	9.7
Range of Throw (m)	>2	>6
Duration of Discharge (secs)	>9	>9
Working Pressure (at 20°C)	12Bar	12Bar
Temperature Range (°C)	+5 to +60	+5 to +60
BS EN3 Approved	YES	YES
MED Approved	N/A	N/A
35kv Conductivity Discharge Test	YES	YES
Pressure Release Valve	YES	YES
Low Freeze Additive	NO	NO
Part Number	81/02905	81/03404
Model Number	W9	W6



PowerX

Foam extinguishers

Stored pressure

- Kitemarked to BS EN3
- High quality product
- Complete with wall bracket
- Nickel plated brass valve assembly
- Coated steel levers
- Polyester external coating
- Easy gauge testing (with needle test)
- Approved to the Pressure Equipment Directive
- Inclusive of pressure release valve
- 5 year warranty

Type	AFFF Foam SP	AFFF Foam SP	AFFF Foam SP	AFFF Multi Use SP	AFFF Foam SP	AFFF Foam SP
Capacity (ltr)	1	2	3	3	6	9
Fire Rating	5A 21B	5A 34B	8A 55B	13A 70B 40F	13A 144B	21A 183B
Height (mm)	330mm	390mm	430mm	455mm	550mm	620mm
Cylinder Diameter (mm)	85mm	110mm	140mm	130mm	162mm	184mm
Overall Width (mm)	125mm	125mm	210mm	217mm	225mm <td 240mm	
Filled Weight (kg)	2	3.8	5.5	5.3	9.7	13.9
Range of Throw (m)	>1	>2	>2	>5	>4	>4
Duration of Discharge (secs)	>6	>6	>9	>13	>15	>15
Working Pressure (at 20°C)	12Bar	12Bar	12Bar	12Bar	12Bar	12Bar
Temperature Range (°C)	0/+60	0/+60	0/+60	+5/+60	0/+60	0/+60
BS EN3 Approved	N/A	YES	YES	YES	YES	YES
MED Approved	N/A	N/A	N/A	NO	N/A	N/A
35KV	NO	YES	YES	YES	YES	YES
Pressure Relief Valve	YES	YES	YES	YES	YES	YES
Low Freeze Additive	NO	NO	NO	NO	NO	NO
Part Number	81/03643	81/03405	81/03406	81/03693	81/02903	81/02904
Model Number	F1	F2	F3	F3K	F6	F9



PowerX

Powder extinguishers

Stored pressure

- Kitemarked to BS EN3
- High quality product
- Supplied with plastic skirt to prevent damage to extinguisher base
- Complete with wall bracket
- Nickel plated brass valve assembly
- Coated steel levers
- Polyester external coating
- Easy gauge testing (with needle test)
- Approved to the Pressure Equipment Directive
- Inclusive of pressure release valve
- 5 year warranty
- **Supplied with Bracket & Strap



Type	ABC Powder SP	ABC Powder SP	ABC Powder SP	ABC Powder SP	ABC Powder SP	ABC Powder SP
Capacity (ltr)	1	2	3	4	6	9
Fire Rating	5A 34BC	13A 70BC	13A 89B	21A 89BC	27A 144BC	34A 183BC
Height (mm)	330mm	390mm	430mm	495mm	545mm	590mm
Cylinder Diameter (mm)	85mm	110mm	125mm	140mm	150mm	184mm
Overall Width (mm)	125mm	125mm	170mm	210mm	225mm	240mm
Filled Weight (kg)	2.1	3.8	5.5	6.8	9.2	13.6
Range of Throw (m)	>2	>2	>2	>4	>4	>4
Duration of Discharge (secs)	>6	>9	>9	>9	>15	>15
Working Pressure (at 20°C)	14Bar	14Bar	14Bar	14Bar	14Bar	14Bar
Temperature Range (°C)	-30/+60	-30/+60	-30/+60	-30/+60	-30/+60	-30/+60
BS EN3 Approved	YES	YES	YES	YES	YES	YES
MED Approved	N/A	N/A	N/A	N/A	N/A	N/A
35KV	N/A	N/A	N/A	N/A	N/A	N/A
Pressure Relief Valve	YES	YES	YES	YES	YES	YES
Low Freeze Additive	N/A	N/A	N/A	N/A	N/A	N/A
Part Number	81/02908	81/02900	81/03645	81/03407	81/02901	81/02902
Model Number	PG1A	PG2A	PG3A **	PG4A	PG6A	PG9A



PowerX

CO₂ extinguishers

- Kitemarked to BS EN3
- High quality product
- Supplied complete with wall bracket
- Brass valve assembly
- Coated steel levers
- Polyester external coating
- High Tensile Steel body
- Approved to the Pressure Equipment Directive
- Inclusive of pressure release valve
- 5 year warranty

Type	CO ₂ Steel	CO ₂ Steel
Capacity (ltr)	2	5
Fire Rating	34B	70B
Height (mm)	595	770
Cylinder Diameter (mm)	103.5	136
Overall Width (mm)	155	180
Filled Weight (kg)	6.3	14.2
Range of Throw (m)	>4	>4
Duration of Discharge (secs)	>6	>9
Working Pressure (at 20°C)	65 bar	65 bar
Temperature Range (°C)	-30 to +60	-30 to +60
BS EN3 Approved	YES	YES
MED Approved	N/A	N/A
35kv Conductivity Discharge Test	N/A	N/A
Pressure Release Valve	YES	YES
Low Freeze Additive	N/A	N/A
Part Number	81/02906	81/02907
Model Number	K2	K5



PowerX

Wet chemical

Stored pressure

- Kitemarked to BS EN3
- High quality product
- Squeeze grip operation
- Fully refillable
- Controlled discharge
- Specifically designed for use on cooking oil fires
- Solution reacts with oil to prevent re-ignition
- Complete with wall bracket
- 5 year warranty

Type	Wet Chemical Spray SP	Wet Chemical Spray SP
Capacity (ltr)	2	6
Fire Rating	8A 40F	13A 75F
Height (mm)	405	550
Cylinder Diameter (mm)	110	162
Overall Width (mm)	130	225
Filled Weight (kg)	4.5	11.23
Range of Throw (m)	>2	>2
Duration of Discharge (secs)	>9	>9
Working Pressure (at 20°C)	7 bar	7 bar
Temperature Range (°C)	+5 to +60	+5 to +60
BS EN3 Approved	YES	YES
MED Approved	N/A	N/A
35kv Conductivity Discharge Test	YES	YES
Pressure Release Valve	YES	YES
Low Freeze Additive	NO	NO
Part Number	81/03409	81/03408
Model Number	W2F	W6F



FirePower

Water extinguishers with additive

Stored pressure

- Kitemarked to BS EN3
- Special additive gives improved fire ratings
- Squeeze grip operation
- Corrosion resistant finish
- Internal polyethylene lining
- Protective plastic base
- Complete with wall bracket
- Carry a 5 year manufacturers warranty if serviced in accordance with BS5306 Part 3

Type	Water Additive SP	Water Additive SP
Capacity (ltr)	3	6
Fire Rating	13A	21A
Height (mm)	426	560
Cylinder Diameter (mm)	130	150
Weight Full (kg)	5.6	9.80
Weight Empty (kg)	2.2	3.3
Overall Width (mm)	280	280
Range of Throw (m)	>3	>3
Discharge Time at 20°C (secs)	25	60
Test Pressure (bar)	33	33
Working Pressure at 20°C (bar)	15	15
Temperature Range (°C)	0 to +60°C	0 to +60°C
Pressure Release Valve	NO	NO
KVA Testing	YES	YES
BS EN3 Approved	YES	YES
MED Approved	NO	NO
Part Number	9911/00	9912/00
Model Number	FPRWA3	FPRWA6
Rating Symbol	A	A



FirePower

Water extinguishers

Stored pressure/cartridge operated

- Kitemarked to BS EN3
- Squeeze grip operation
- Corrosion resistant finish
- Internal polyethylene lining
- Protective plastic base
- Complete with wall bracket
- Carry a 5 year manufacturers warranty if serviced in accordance with BS5306 Part 3

Type	Water C/O	Water SP	Water Spray SP
Capacity (ltr)	9	9	6
Fire Rating	21A	21A	13A
Height (mm)	620	522	560
Cylinder Diameter (mm)	190	190	150
Weight Full (kg)	14.9	13.29	9.52
Weight Empty (kg)	5.9	4.265	3.33
Overall Width (mm)	290	320	280
Range of Throw (m)	>10	>10	>3
Discharge Time at 20°C (secs)	60	60	50
Test Pressure (bar)	33	33	33
Working Pressure at 20°C (bar)	15	15	15
Temperature Range (°C)	+5 to +60°C	+5 to +60°C	+5 to +60°C
Pressure Release Valve	NO	NO	NO
KVA Testing	NO	NO	YES
BS EN3 Approved	YES	YES	YES
MED Approved	YES	YES	NO
Part Number	9908/00	9909/00	9910/00
Model Number	FPRW9C	FPRW9	FPRWS6
Rating Symbol	A	A	A



FirePower

Foam extinguishers

Stored pressure

- Kitemarked to BS EN3
- Spray nozzle
- Squeeze grip operation
- Corrosion resistant finish
- Internal polyethylene lining
- Protective plastic base*
- Complete with wall bracket
- Carry a 5 year manufacturers warranty if serviced in accordance with BS5306 Part 3

*Excludes 2ltr model

Type	AFFF Foam SP	AFFF Foam SP	AFFF Foam SP	AFFF Foam SP
Capacity (ltr)	2	3	6	9
Fire Rating	8A 55B	13A 89B	21A 144B	27A 183B
Height (mm)	395	426	560	522
Cylinder Diameter (mm)	112	130	150	190
Weight Full (kg)	3.81	5.3	9.65	13.24
Weight Empty (kg)	1.71	2.2	3.38	4.27
Overall Width (mm)	150	300	300	340
Range of Throw (m)	>2	>4	>4	>4
Discharge Time at 20°C (secs)	12	18	30	50
Test Pressure (bar)	33	33	33	33
Working Pressure at 20°C (bar)	15	15	15	15
Temperature Range (°C)	+5 to +60°C	+5 to +60°C	+5 to +60°C	+5 to +60°C
Pressure Release Valve	NO	NO	NO	NO
KVA Testing	YES	YES	YES	YES
BS EN3 Approved	YES	YES	YES	YES
MED Approved	NO	NO	NO	NO
Part Number	9204/00	9233/00	9234/00	9235/00
Model Number	FPP2	FPRF3	FPRF6	FPRF9
Rating Symbol	A B	A B	A B	A B



FirePower

Foam extinguishers

Cartridge operated

- Kitemarked to BS EN3
- Spray nozzle
- Squeeze grip operation
- Corrosion resistant finish
- Internal polyethylene lining
- Protective plastic base
- Complete with wall bracket
- Carry a 5 year manufacturers warranty if serviced in accordance with BS5306 Part 3

Type	AFFF Foam C/O	AFFF Foam C/O	AFFF Foam C/O
Capacity (ltr)	6	9	6
Fire Rating	21A 183B	27A 233B	13A 113B
Height (mm)	600	620	600
Cylinder Diameter (mm)	150	190	150
Weight Full (kg)	10.6	15.7	10.6
Weight Empty (kg)	4.5	6.6	4.5
Overall Width (mm)	310	290	310
Range of Throw (m)	>5	>5	>5
Discharge Time at 20°C (secs)	30	40	30
Test Pressure (bar)	33	33	33
Working Pressure at 20°C (bar)	15	15	15
Temperature Range (°C)	+5 to +60°C	+5 to +60°C	+5 to +60°C
Pressure Release Valve	NO	NO	NO
KVA Testing	YES	YES	YES
BS EN3 Approved	YES	YES	YES
MED Approved	NO	YES	NO
Part Number	9230/00	9231/00	9232/00
Model Number	FPRF6C	FPRF9C	FPRFAR6C
Rating Symbol	A B	A B	A B





Powder extinguishers

Stored pressure

- Kitemarked to BS EN3
- Multi-purpose application
- Squeeze grip operation
- Corrosion resistant finish
- Protective plastic base*
- Complete with wall bracket
- Carry a 5 year manufacturers warranty if serviced in accordance with BS5306 Part 3

*Excludes 1kg and 2kg models

Type	ABC Powder SP	ABC Powder SP	ABC Powder SP	ABC Powder SP	ABC Powder SP	Monnex Powder SP
Capacity (ltr)	1	2	4	6	9	9
Fire Rating	8A 55B	13A 70B	21A 113B	34A 233B	43A 233B	233B
Height (mm)	340	370	420	503	588	620
Cylinder Diameter (mm)	80	112	150	150	170	190
Weight Full (kg)	1.67	3.62	6.4	8.94	12.98	14.4
Weight Empty (kg)	0.67	1.62	2.39	2.94	3.97	8.4
Overall Width (mm)	135	150	293	260	317	310
Range of Throw (m)	>2	>2	>6	>6	>7	>7
Discharge Time at 20°C (secs)	9	10	16	20	20	20
Test Pressure (bar)	33	33	33	33	33	33
Working Pressure at 20°C (bar)	15	15	15	15	15	15
Temperature Range (°C)	-30 to +60°C	-30 to +60°C	-30 to +60°C	-30 to +60°C	-30 to +60°C	-20 to +60°C
Pressure Release Valve	NO	NO	NO	NO	NO	NO
KVA Testing	N/A	N/A	N/A	N/A	N/A	N/A
BS EN3 Approved	YES	YES	YES	YES	YES	YES
MED Approved	NO	NO	NO	YES	YES	NO
Part Number	9315/00	9307/00	9318/00	9319/00	9320/00	9324/00
Model Number	FPP1	FPP2	FPRP4	FPRP6	FPRP9	FPRP9M
Rating Symbol	A B C E	A B C	A B C E	A B C E	A B C E	B C E



FirePower

Powder extinguishers

Cartridge operated

- Kitemarked to BS EN3
- Squeeze grip operation
- Controlled discharge
- Multi-purpose application
- Complete with wall bracket
- Strong protective base
- Robust discharge hose
- Carry a 5 year manufacturers warranty if serviced in accordance with BS5306 Part 3

Type	ABC Powder C/O	ABC Powder C/O
Capacity (ltr)	6	9
Fire Rating	34A 233B	43A 233B
Height (mm)	550	595
Cylinder Diameter (mm)	150	170
Weight Full (kg)	10.1	14
Weight Empty (kg)	4.1	5
Overall Width (mm)	280	300
Range of Throw (m)	>6	>7
Discharge Time at 20°C (secs)	18	20
Test Pressure (bar)	33	33
Working Pressure at 20°C (bar)	15	15
Temperature Range (°C)	-30 to +60°C	-30 to +60°C
Pressure Release Valve	NO	NO
KVA Testing	N/A	N/A
BS EN3 Approved	YES	YES
MED Approved	YES	YES
Part Number	9321/00	9322/00
Model Number	FPRP6C	FPRP9C
Rating Symbol	A B C E	A B C E



FirePower

CO₂ extinguishers

- Kitemarked to BS EN3
- Squeeze grip operation
- Corrosion resistant finish
- Harmless to machinery
- 2kg model supplied with frost free horn as standard
- Complete with wall bracket (non-magnetic CO₂ wall bracket is non-magnetic)
- Carry a 5 year manufacturers warranty if serviced in accordance with BS5306 Part 3

Type	CO ₂ Aluminium	CO ₂ Aluminium	CO ₂ Aluminium Non-Magnetic
Capacity (ltr)	2	5	2
Fire Rating	34B	70B	34B
Height (mm)	490	750	490
Cylinder Diameter (mm)	117	152	117
Weight Full (kg)	4.91	11.43	4.91
Weight Empty (kg)	2.91	6.43	2.91
Overall Width (mm)	180	310	180
Range of Throw (m)	>4	>4	>4
Discharge Time at 20°C (secs)	8	14	8
Test Pressure (bar)	212	212	212
Working Pressure at 20°C (bar)	56	56	56
Temperature Range (°C)	-30 to +60°C	-30 to +60°C	-30 to +60°C
Pressure Release Valve	YES	YES	YES
KVA Testing	N/A	N/A	N/A
BS EN3 Approved	YES	YES	NO
MED Approved	NO	YES	NO
Part Number	9705/00	9706/00	9705/65
Model Number	FPC2SC	FPC5C	FPC2SC
Rating Symbol	B E	B E	B E



FirePower

Specialist extinguisher

Stored pressure

- Corrosion resistant high grade valve
- Seize and squeeze for maximum control
- Unique lance applicator designed to allow the powder to fall gently over the fire
- Colour coded zone for easy identification
- Highly effective against metal fires, including Lithium when in the form of powder or swarf (will control any metal fire ending in 'ium')
- Carry a 5 year manufacturers warranty if serviced in accordance with BS5306 Part 3

Type	Lithium L2 Powder SP
Capacity (ltr)	9
Fire Rating	N/A
Height (mm)	620
Cylinder Diameter (mm)	190
Weight Full (kg)	15.08
Weight Empty (kg)	6.08
Overall Width (mm)	500
Range of Throw (m)	N/A
Discharge Time at 20°C (secs)	30
Test Pressure (bar)	33
Working Pressure at 20°C (bar)	15
Temperature Range (°C)	-20 to +60°C
Pressure Release Valve	YES
KVA Testing	N/A
BS EN3 Approved	NO
MED Approved	NO
Part Number	9325/00
Model Number	FPRP9L
Rating Symbol	D



FirePower

Wet chemical

Stored pressure

- Kitemarked to BS EN3
- Capable of extinguishing a cooking oil or fat fire of up to 75 litres in size
- 13A fire rating for all round safety
- EN3 red with official canary yellow colour coding
- User friendly 6 litre size – supplied factory filled
- Wet chemical process seals the surface of burning oil to prevent re-ignition
- Carry a 5 year manufacturers warranty if serviced in accordance with BS5306 Part 3

Type	Wet Chemical Spray SP
Capacity (ltr)	6
Fire Rating	13A 113B 75F
Height (mm)	662
Cylinder Diameter (mm)	170
Weight Full (kg)	12.13
Weight Empty (kg)	7.1
Overall Width (mm)	310
Range of Throw (m)	>4
Discharge Time at 20°C (secs)	30
Test Pressure (bar)	33
Working Pressure at 20°C (bar)	7
Temperature Range (°C)	-10 to +60°C
Pressure Release Valve	YES
KVA Testing	YES
BS EN3 Approved	YES
MED Approved	YES
Part Number	9503/00
Model Number	FPRWC6
Rating Symbol	A B F





Polished extinguishers

Stored pressure

- Ideal for environments where hygiene is paramount and when considering architecture
- Highly polished surface finish
- Corrosion resistant construction
- Simple 'seize and squeeze' operation
- Controllable discharge assures efficient use of contents and minimises clean-up
- All extinguishers are re-chargeable
- Carry a 5 year manufacturers warranty if serviced in accordance with BS5306 Part 3

Type	Water SP	Water SP	AFFF Foam SP	AFFF Foam SP	CO ₂ Polished Aluminium
Model	6ltr Water	9ltr Water	6ltr Foam	9ltr Foam	2kg CO ₂
Height (mm)	550	620	550	620	348
Cylinder Diameter (mm)	162	184	162	184	490
Overall Width (mm)	225	240	225	240	117
Weight Full (kg)	9.7	13.9	9.7	13.9	4.91
Range of Throw (M)	>6	>2	>4	>4	>4
Discharge time (secs)	>9	>9	>15	>15	>8
Working Pressure at 20°C	12bar	12bar	12bar	12bar	56bar
Temperature Range (°C)	+5 to +60°C	+5 to +60°C	0 to +60°C	0 to +60°C	-30 to +60°C
BS EN3 Approved	No	No	No	No	No
MED Approved	No	No	No	No	No
35kv Conductivity Discharge Test	Yes	Yes	Yes	Yes	Yes
Pressure Release Valve	Yes	Yes	Yes	Yes	Yes
Low Freeze Additive	No	No	No	No	N/A
Fire Rating	13A	13A	13A 144B	21A 183B	34B
Model Number	FPW6S	FPW9S	FPF6S	FPF9S	FPC2SC
Product No	9913/00	9914/00	9221/00	9222/00	9705/06





Water extinguishers

Stored pressure / cartridge operated

- Kitemarked to BS EN3
- Squeeze grip operation
- Fully refillable
- Controlled discharge
- Internal polyethylene lining
- Complete with wall bracket
- Strong protective base
- Robust discharge hose



Type	Water SP	Water CO
Capacity (ltr/kg)	9	9
Fire Rating	13A	21A
Height	613	620
Cylinder Diameter (mm)	190	190
Overall Width (mm)	280	290
Filled Weight (kg)	15.37	15.2
Range of Throw (m)	4	4
Duration of Discharge (secs)	60	97
Working Pressure (at 20°C)	7 bar nitrogen	14 bar nitrogen
Temperature Range (°C)	+5°C to +60°C	+5°C to +60°C
BS EN3 Approved	YES	YES
MED Approved	YES	YES
35kv Conductivity Discharge Test	YES	YES
Pressure Relief Valve	NO	NO
Low Freeze Additive	NO	NO
Part Number	4903/207	4907/207
Model Number	W9DN	W19DB/W9E



Foam extinguishers

Stored pressure

- Kitemarked to BS EN3
- Squeeze grip operation
- Fully refillable
- Controlled discharge
- Internal polyethylene lining
- Complete with wall bracket
- Strong protective base*
- Robust discharge hose
- Spray nozzle

**Excludes 2ltr model 2ltr shrouded head has unique push button operation and supplied with wire transport bracket and strap*



Type	Foam SP (shrouded head)	Foam SP	Foam SP
Capacity (ltr/kg)	2	6	9
Fire Rating	5A 55B	21A 183B	27A 233B
Height	365	557	522
Cylinder Diameter (mm)	108	150	190
Overall Width (mm)	110	162	202
Filled Weight (kg)	3.1	9.6	14.2
Range of Throw (m)	4	4	4
Duration of Discharge (secs)	25	34	55
Working Pressure (at 20°C)	15 bar nitrogen	15 bar nitrogen	15 bar nitrogen
Temperature Range (°C)	0°C to +60°C	0°C to +60°C	0°C to +60°C
BS EN3 Approved	YES	YES	YES
MED Approved	NO	YES	YES
35kv Conductivity Discharge Test	YES	YES	YES
Pressure Relief Valve	NO	NO	NO
Low Freeze Additive	NO	NO	NO
Part Number	4256/207	4264/207	4265/207
Model Number	S2LW	S6DLWB/SD6	S9DLWB/SD9





Foam extinguishers

Cartridge operated

- Kitemarked to BS EN3
- Squeeze grip operation
- Fully refillable
- Internal polyethylene lining
- Complete with wall bracket
- Strong protective base
- Robust discharge hose
- Spray nozzle
- Supplied empty with foam refill

Type	AFFF CO	AFFF CO
Capacity (ltr/kg)	6	9
Fire Rating	21A 183B	21A
Height	600	620
Cylinder Diameter (mm)	150	190
Overall Width (mm)	310	290
Filled Weight (kg)	9.8	15.2
Range of Throw (m)	5	4
Duration of Discharge (secs)	68	97
Working Pressure (at 20°C)	Cartridge operated 35g CO ₂	14 bar nitrogen
Temperature Range (°C)	+5°C to +60°C	+5°C to +60°C
BS EN3 Approved	YES	YES
MED Approved	YES	YES
35kv Conductivity Discharge Test	YES	YES
Pressure Relief Valve	NO	NO
Low Freeze Additive	NO	NO
Part Number	4262/207	4907/207
Model Number	S16DB/S6E	W19DB/W9E



Powder extinguishers

Cartridge operated

- Squeeze grip operation
- Fully refillable
- Controlled discharge
- Multi-purpose application
- Heavy duty brass head assembly
- Complete with wall bracket
- Strong protective base
- Robust discharge hose

Type	Powder CO	Powder CO
Capacity (ltr/kg)	6	12
Fire Rating	34A 183B C	55A 233B C
Height	538	637
Cylinder Diameter (mm)	150	190
Overall Width (mm)	226	246
Filled Weight (kg)	11.2	20.7
Range of Throw (m)	6	7
Duration of Discharge (secs)	22	32
Working Pressure (at 20°C)	Cartridge Operated 140g CO ₂	Cartridge Operated 280g CO ₂
Temperature Range (°C)	-30°C to +60°C	-30°C to +60°C
BS EN3 Approved	YES	YES
MED Approved	YES	YES
35kv Conductivity Discharge Test	N/A	N/A
Pressure Relief Valve	NO	NO
Low Freeze Additive	NO	NO
Part Number	4360/207	4368/207
Model Number	PEP6GA	PEP12GA





Powder extinguishers

Stored pressure

- Kitemarked to BS EN3
- Squeeze grip operation
- Fully refillable
- Controlled discharge
- Multi-purpose application
- 1 & 2kg c/w wire transport bracket and securing strap
- 6,9 & 12kg c/w wall mounting bracket
- Strong protective base*
- Robust discharge hose (4,6,9 & 12kg)
- 1kg and 2kg shrouded head models have unique push button operation and supplied with wire transport bracket and strap

*Excludes 1kg and 2kg models

Type	Powder SP	Powder SP	Powder SP	Powder SP	Powder SP	Powder SP SH	Powder SP SH	Powder SP SH
Capacity (ltr/kg)	1	2	4	6	9	12	1	2
Fire Rating	8A 34B C	13A 89B C	21A 89B C	34A 233B C	43A 233B C	55A 233B C	8A 34B C	13A 89B C
Height	280	327	410	500	610	590	180	322
Cylinder Diameter (mm)	90	110	150	150	170	170	90	110
Overall Width (mm)	93	144	300	270	265	265	280	111
Filled Weight (kg)	2.1	3.8	6.7	9.1	13.7	17.3	2.2	3.5
Range of Throw (m)	4	4	6	6	7	7	4	4
Duration of Discharge (secs)	8	9	13	20	17	21	8	13
Working Pressure (at 20°C)	15 bar nitrogen	15 bar nitrogen	15 bar nitrogen	15 bar nitrogen	15 bar nitrogen	15 bar nitrogen	15 bar nitrogen	15 bar nitrogen
Temperature Range (°C)	-30°C to +60°C	-30°C to +60°C	-30°C to +60°C	-30°C to +60°C	-30°C to +60°C	-30°C to +60°C	-30°C to +60°C	-30°C to +60°C
BS EN3 Approved	YES	YES	YES	YES	YES	YES	YES	YES
MED Approved	NO	YES	NO	YES	YES	YES	NO	YES
35kv Conductivity Discharge Test	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Pressure Relief Valve	NO	NO	NO	NO	NO	NO	NO	NO
Low Freeze Additive	NO	NO	NO	NO	NO	NO	NO	NO
Part Number	4358/207	4352/207	4354/207	4356/207	4359/207	4366/207	4351/207	4362/207
Model Number	PD1GA	PD2G	PD4GA	PD6GA	PD9GA	PD12GA	F1GM (GB)	P2GM





CO₂ extinguishers

- Kitemarked to BS EN3
- Squeeze grip operation
- Corrosion resistant finish
- 2kg model supplied with frost free horn as standard
- CO₂ gas harmless to machinery
- Complete with wall bracket

Type	CO ₂ Aluminium	CO ₂ Aluminium
Capacity (ltr/kg)	2	5
Fire Rating	34B	70B
Height	490	750
Cylinder Diameter (mm)	117	152
Overall Width (mm)	180	310
Filled Weight (kg)	4.91	11.43
Range of Throw (m)	4	4
Duration of Discharge (secs)	8	14
Working Pressure (at 20°C)	56 bar nitrogen	56 bar nitrogen
Temperature Range (°C)	-30°C to +60°C	-30°C to +60°C
BS EN3 Approved	YES	YES
MED Approved	NO	YES
35kv Conductivity Discharge Test	N/A	N/A
Pressure Relief Valve	YES	YES
Low Freeze Additive	N/A	N/A
Part Number	4705/207	4707/207
Model Number	C20G	C50G



F class

Stored pressure

- Kitemarked to BS EN3
- Squeeze grip operation
- Fully refillable
- Controlled discharge
- Lance applicator
- Specifically designed for use on cooking oil fires
- Solution reacts with oil to prevent re-ignition
- Complete with wall bracket

Type	F Class SP	F Class SP
Capacity (ltr/kg)	3	6
Fire Rating	8A 55B 75F	13A 113B 5F
Height	434	675
Cylinder Diameter (mm)	150	170
Overall Width (mm)	141	305
Filled Weight (kg)	7	13
Range of Throw (m)	3	4
Duration of Discharge (secs)	18	30
Working Pressure (at 20°C)	7 bar nitrogen	7 bar nitrogen
Temperature Range (°C)	-30°C to +60°C	-10°C to +60°C
BS EN3 Approved	YES	YES
MED Approved	NO	NO
35kv Conductivity Discharge Test	YES	YES
Pressure Relief Valve	NO	NO
Low Freeze Additive	NO	NO
Part Number	201F4503/207	201F4502/207
Model Number	W3DFC/FBDP3	W6DRC/FBDP6



3 Lt

6 Lt



Fixed, swinging and recessed

A range of slimline manual and automatic hose reels

- All reels are supplied without hose to aid installation
- Automatic or manual operation
- Easy to install and maintain and simple to operate
- Accommodates 30m of 25mm or 19mm bore hose
- Manufactured from zinc plated steel and epoxy polyester powder coated
- Jet spray nozzle included with all models
- Beaded hose guides on fixed reels allows hose to be drawn out easily in any direction (included on all models)
- Gate valves and Flexible Water Inlet supplied separately
- Current range reels require the 25ml flexible water inlet pipe

Fixed hose reel

Part No.	Description
43/51231	Hose reel 19mm Manual
43/51236	Hose reel 25mm Manual
43/51232	Hose reel 19mm Automatic
43/51237	Hose reel 25mm Automatic

Swinging hose reel

Part No.	Description
43/51233	Hose reel 19mm Manual
43/51235	Hose reel 25mm Manual
43/51234	Hose reel 19mm Automatic
43/51238	Hose reel 25mm Automatic

Fixed hose reel

Part No.	Description
43/01057	19mm nozzle - TG (A)
43/01058	25mm nozzle - TG (A)
46/57489	19mm nozzle - Chrome plated (B)
43/50310	25mm nozzle - Chrome plated (B)
43/01006	Gate valve - 19mm (C)
43/01007	Gate valve - 25mm (C)
43/50307	Budget hose guide (D)
43/01015	Noha hose guide (D)
60/70072	Jubilee clip - 19mm (E)
60/70073	Jubilee clip - 25mm (E)
43/01054	Flexible water inlet pipe 3/4" thread fits Noha fixed auto reel (F)
43/01056	Flexible water inlet pipe 1" BSP thread fits Noha 25ml & Delta 19ml and 25ml reels (F)
81/02827	Swan neck coupling - 19mm
81/02828	Swan neck coupling - 25mm
81/02983	Blanking off plug - 19mm
81/02984	Blanking off plug - 25mm

A



B



C



D



E



F



Hose reel pedestal

- Manufactured from 5mm thick steel plate
- Epoxy polyester powder stove paint post office red
- Will accommodate fixed, swinging or recessed hose reels

Part No.	Description
81/02401	Pedestal



Hose reel tubing

EN 694 approved

- High-quality hose reel tubing approved to EN 694.
- Thermoplastic covered hose reel tubing for use on hose reels in fixed installations
- Working pressure 12 bar
- Temperature Range: -20° to +60°C

Part No.	Description
3645/04	19mm x 30m (A)
3645/06	19mm x 45m (A)
3645/11	25mm x 30m (B)



Wheeled powder extinguishers med & non med versions

External cartridge

- Highly effective with a fast flame knockdown
- Highly manoeuvrable
- Supplied filled
- Available in 25kg, 50kg and 100kg
- Steel body internal and external polyester coating
- MED Approved

Type	ABC Powder CO	ABC Powder CO	ABC Powder CO
Capacity (kg)	25	50	100
Cartridge CO ₂ Fill (kg)	2	2	4
Hose Length (m)	5	5	5
Height (mm)	1020	1050	1290
Cylinder Diameter (mm)	245	300	360
Overall Width (mm)	400	440	540
Filled Weight (kg)	60	84	120
Range of Throw (m)	11	12	12
Duration of Discharge (secs)	25	40	80
Working Pressure (bar)	14	14	14
Temperature Range (°C)	-30 to 60°C	-30 to 60°C	-30 to 60°C
BS EN1866 Approved	YES	YES	YES
Part Number	81/18131	81/18161	81/1816



Wheeled CO₂ extinguishers med & non med versions

- Ideal for protecting large electrical risks
- Supplied filled
- Rapid fire control with minimum clean up
- Available in 10kg and 20kg
- Steel body external polyester coating
- MED Approved

Type	CO Steel	CO Steel
Capacity (kg)	10	20
Cartridge (kg)	N/A	N/A
Hose Length (m)	5	5
Height (mm)	900	965
Cylinder Diameter (mm)	154	230
Overall Width (mm)	350	410
Filled Weight (kg)	38	68
Range of Throw (m)	4	4
Duration of Discharge (secs)	17	32
Working Pressure (bar)	60	60
Temperature Range (°C)	-30 to 60°C	-30 to 60°C
BS EN1866 Approved	YES	YES
Part Number	81/18311	81/18321



Wheeled foam extinguishers med & non med versions

External cartridge


- Highly effective Aqueous Film Forming Foam (AFFF)
- Supplied empty with a separate foam charge
- Available in 50 litres and 100 litres
- Stainless steel body external epoxy polyester coating
- MED Approved

Type	CO Steel	CO Steel
Capacity (kg)	50	100
Cartridge CO ₂ fill (kg)	1.3	3
Hose Length (m)	5	5
Height (mm)	1145	1335
Cylinder Diameter (mm)	315	400
Overall Width (mm)	455	550
Filled Weight (kg)	84	150
Range of Throw (m)	8	8
Duration of Discharge (secs)	46	99
Working Pressure (bar)	13	14
Temperature Range (°C)	0 to 60°C	0 to 60°C
BS EN1866 Approved	YES	YES
Part number	81/18258	81/03594



Wheeled extinguishers spares

A range of spares for TG wheeled extinguishers



TG Part No.	ABS Part No.	Description	10kg CO ₂	20kg CO ₂	25kg Powder	50kg Powder	100kg Powder	50l Foam	100l Foam
81/03442	20007	Adaptor for CO ₂ C36 Cylinder				x	x	x	x
81/03443	20021	Washer Ring 3/4"			x	x	x	x	
81/03444	20022	Washer Black Rubber 2"			x				
81/03445	20024	Coupling						x	x
81/03446	20059	Adaptor for N2 Cylinder			x				
81/03042	20204	5.4ltr CO ₂ Cylinder 4kg Fill					x		
81/03202	20302	3ltr CO ₂ Cylinder 2kg fill				x			x
81/03447	20516	Manometer 1/8"				x	x	x	x
81/02557 - Picture C	20640	Discharge Hose 5m			x				
81/03086	20649	Discharge Hose 5m				x	x		
81/03078	20652	Discharge Hose	x	x					
81/03082 - Picture A	20656	Discharge Hose 5m						x	x
81/03448	20831	Handwheel Valve				x	x	x	x
81/03449	21006/21007	Foam Nozzle Light Alloy						x	x
81/03450	21010	Check Valve Schroeder Type				x	x	x	x
81/03451	21017	Protection Cap	x	x					
81/03452	21018	Safety Pin			x				
81/03453	21020	Safety Disc	x	x					
81/03454	21021	Gasket for Discharge Hose							x
81/03455	21028	M30 x 1.5 Safety Valve				x	x		
81/02558 - Picture B	21035	Plastic Discharge Pistol			x				
42/62000	21036	Washer Ring Fibre	x	x		x	x		
81/03456	21038	Plastic discharge Horn				x			
81/03085	21039	Plastic discharge Horn					x		
81/03087	21041	Washer Black Rubber 4"				x	x		
81/03457	21042	Cap G				x	x		
81/03458	21055	O'Ring			x				
81/03065	21093	Sealfire 2l - 3% concentrate							x
81/03459	21119	Trolley Frame						x	
81/03460	21127	Discharge Apparatus	x	x					
81/03461	21144	Cap G.4"						x	x
81/03462	21706	Siphon Tube						x	x
81/03463	21742	Siphon Tube	x						
81/03464	21802	3/4" Handwheel Valve	x	x					
81/03079	21931	Wheel	x	x	x	x		x	x
81/03465	21941	400m Wheels Plastic and Rubber					x		
81/03466	28004	Safety Seal	x	x		x	x		
81/03467	28024	Safety Valve 1/4"			x			x	x
81/03468	31209	Powder BC Karate			x				
81/03469	31230	Powder ABC MAP 30%				x	x		
81/03064	33395	Sealfire 1l - 3% concentrate						x	
81/03470	66030	Turning Valve Brass 3/4"				x	x	x	x
81/03471	83011	3/4 Filter						x	x
81/03041	???	3ltr CO ₂ Cylinder 1.3kg fill			x			x	
81/03472	20021_1	Washer Ring Teflon 11 x 19 x 2			x				
81/03473	20033_1	CO ₂ Frame for Trolley	x						
81/03474	20209_1	14ltr Cylinder	x						
81/03475	20640_1	Discharge Hose 10m			x				
81/03476	20640_15	Discharge Hose 15m			x				
81/03477	20649_10	Discharge Hose 10m				x	x		
81/03478	20656_1	Discharge Hose 10m						x	x
81/03479	21013_1	CO ₂ Frame for Trolley		x					
81/03480	21034_1	Brass Cap 2"			x				
81/03481	21330_1	27ltr Cylinder		x					
81/03482	21704_1	Siphon Tube		x					
81/03483	21818_1	Handwheel Valve			x				
81/03484	41231_3	Spare Charged Cartridge 2l - 140 Bar			x				
81/02611		Wheeled Extinguisher Cover					x		x
47/95115		Wheeled Extinguisher Cover	x						

Fire blankets

Approved to BSEN 1869: 1997

- CS06 rating
- All blankets comply with BSEN 1869:1997 and are kitemarked
- A range of top quality slim fire blankets with flush end caps for easy cleaning
- 12 month warranty / 7 year life expectancy
- 300g/m² +/-20g 200 gram cloth ensures flexibility and drapability
- Satin weave
- Warp 950/Weft 420
- Silicone coating on either side of blanket
- 0.25mm +/- 0.03mm thickness

Part No.	Description
81/03543	1.1m x 1.1m slim pack - red
81/03544	1.2m x 1.2m slim pack - red
81/03545	1.8m x 1.2m slim pack - red



Aerosol extinguishers

- BSI certified to BS6165: 2002
- Manufactured in the UK under ISO 9001:2002 quality management system
- Aluminium lightweight body and polypropylene headcap with controlled discharge
- 600GM BC Dry Powder Fire Extinguisher fire rating 21B
- 900GM BC Dry Powder Fire Extinguisher fire rating 34B
- Disposable product not refillable

Part No.	Description
81/02561	600GM BC Dry Powder Fire Extinguisher
81/02562	900GM BC Dry Powder Fire Extinguisher



Automatic extinguishers

Clean agent

- Compact and economical automatic extinguisher
- FE-36 Clean Agent (Halon replacement) with zero ozone depletion
- Used to protect plant or machinery in an enclosed space
- Only one unit should be installed in each compartment

Unit required is determined by gross volume of compartment:

- 1kg provides protection for maximum enclosed volume of 1.7m³
- 1.5kg provides protection for maximum enclosed volume of 2.5m³
- 2kg provides protection for maximum enclosed volume of 3.4m³

Part No.	Description
81/02563	1kg Automatic Clean Agent Fire Extinguisher
81/02564	1.5kg Automatic Clean Agent Fire Extinguisher
81/02565	2kg Automatic Clean Agent Fire Extinguisher
81/03685	4kg Automatic Clean Agent Fire Extinguisher
81/03682	6kg Automatic Clean Agent Fire Extinguisher



Automatic extinguishers

Dry powder

- Compact and economical automatic extinguisher
- Used to protect plant or machinery in an enclosed space
- Only one unit should be installed in each compartment
- Unit required is determined by the floor area of compartment:
- 1kg provides protection for maximum enclosed volume of 1m²
- 2kg provides protection for maximum enclosed volume of 2m²

Part No.	Description
81/02566	1kg Automatic ABC Dry Powder Fire Extinguisher
81/02567	2kg Automatic ABC Dry Powder Fire Extinguisher
81/03686	4kg ABC Dry Powder Fire Extinguisher
81/03681	6kg ABC Dry Powder Fire Extinguisher



Equipment Protection

Extinguisher & document protection

Mobile fire points and stands

2

In this section



27- 28
TG Range: Stands



28
TG Range: Cabinets



28
TG Range: Backboards



29
TG Range: Tubed range
& packages



30- 31
Jonesco Range:
Cabinets



32
Jonesco Range:
FireKart



32
Jonesco Range:
Stands



33-35
Mobile fire points /
contractor stand



35
Contractors stand
package



35
Fire buckets



36
Document cabinets
& pouch



36
Fire log books & holders



36
Theft stoppers

Flat pack, deep based 'modular' stand

- Modular so allows unlimited configuration (no maximum fitted together)
- 2 x part flatpack / deepbase design
- Smooth mounting site for standard sized landscape or portrait ID signs
- Will accommodate all sizes of extinguisher
- Made from durable 'polypropylene' material
- Available in 2 x colours
- Single Packs only with 2 x clips included
- Condensed packaging to allow volume to be carried easily on a vehicle

Part No.	Description
81/03694	Red - H665 x W292 x D270mm
81/03137	Grey - H665 x W292 x D270mm



Extinguisher stands - rotationally moulded

- Environmentally friendly-manufactured from recyclable or recycled materials
- Will not chip or crack
- Non slip design

Part No.	Description
81/03136	TG single stand red rotatorially moulded - H750 x W330 x D310mm
81/03137	TG double stand red rotatorially moulded - H740 x W610 x D310mm



Extinguisher stands - moulded plastic

- Supplied in packs of 2 or single pack
- Will accommodate landscape or portrait ID signs
- High impact plastic material 3mm thick
- High gloss finish
- Protective film applied for shipping
- Recessed base to secure 2kg CO₂

Part No.	Description
81/02531	Single stand red plastic (pack of 2) - H760 x W300 x D270mm
81/02532	Double stand red plastic (pack of 2) - H760 x W570 x D270mm
81/02531N	Single stand red plastic (single pack)
81/02532N	Double stand red plastic (single pack)
81/03608	Single stand grey plastic (single pack) - H760 x W300 x D270mm
81/03609	Double stand grey plastic (single pack) - H760 x W570 x D270mm



Extinguisher fire points

- High impact plastic material 3mm thick
- High gloss finish
- Protective film applied for shipping
- Recessed base to secure 2kg CO₂

Part No.	Description
81/02529	Single fire point red plastic - H80 x W270 x D280mm
81/02530	Double fire point red plastic - H80 x W550 x D280mm
81/03617	Single fire point grey plastic - H80 x W270 x D280mm
81/03618	Double fire point grey plastic - H80 x W550 x D280mm



Hinged door cabinets - rotationally moulded

- Environmentally friendly-manufactured from recyclable or recycled materials
- Will not chip or crack
- Toggle clamp closure method
- Higher impact strength than GRP
- Suitable for wall or post mounting
- Internal securing strap

Part No.	Description
81/03138	TG single cabinet rotationally moulded (up to 9kg/9ltr capacity) - H713 x W328 x D266mm
81/03139	TG double cabinet rotationally moulded (up to 9kg/9ltr capacity) - H713 x W583 x D232mm
81/03140	TG single cabinet extended rotationally moulded (up to 5kg capacity) - H825 x W328 x D266mm
81/03326	Single cabinet spare glass (fits 81/03138)
81/03327	Double cabinet spare glass (fits 81/03139)
81/03328	Extended cabinet spare glass (fits 81/03140)
81/03680	Spare latch
81/03555	Spare fastening clip



Extinguisher backboards

- Softwood backboards for wall mounting fire extinguishers

Part No.	Description
45/57346	Single Back Board Unvarnished (pack of 25)
201F31221.01	Single Back Board White (single pack) - W200 x L710 x D12mm
201F31222.01	Double Back Board White (single pack) - W482.5 x L710 x D12mm



Extinguisher stands - tubed range

- Chrome version comes with high quality chrome plated finish
- 25mm diameter tubing
- Single supplied with 1 x CO₂ bracket and 1 x J bracket
- Double supplied with 1 x CO₂ bracket and 2 x J brackets
- Black plastic feet fitted to protect stand

Part No.	Description
81/03007	Single chrome - H740 x W320 x D275mm
81/03008	Double chrome - H740 x W526 x D275mm
81/03508	Treble chrome - H740 x W706 x D300mm
81/03502	Single black - H740 x W320 x D275mm
81/03503	Double black - H740 x W526 x D275mm
81/03513	Single red - H740 x W320 x D275mm
81/03514	Double red - H740 x W526 x D275mm



Fixings for tubed stands

Part No.	Description
1/03009	Signage clip (A)
81/03506	Signage bracket (B)




Brushed chrome look ID signs

Part No.	Description
81/03566	Brushed chrome look ID sign - Foam - H150 x W100mm (A)
81/03567	Brushed chrome look ID sign - Water - H150 x W100mm
81/03568	Brushed chrome look ID sign - CO ₂ - H150 x W100mm



Package offers

Part No.	Description
81/03600	Double chrome stand, 2kg CO ₂ Extinguisher, 6ltr Foam Extinguisher, 2 x signage brackets, 1 x Foam & 1 x CO ₂ brushed chrome ID sign (B)
81/03601	Double chrome stand, 2kg CO ₂ Extinguisher, 6ltr Water Extinguisher, 2 x signage brackets, 1 x Water & 1 x CO ₂ brushed chrome ID sign (C)

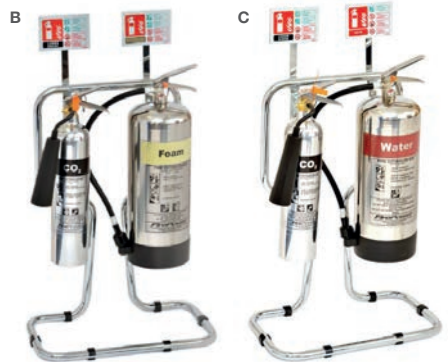

Jonesco single extinguisher cabinet

- Truck or wall mounting
- Rubber seal & polycarbonate windows
- Buckle web strap

Part No.	Description
81/03316	6kg single cabinet - H700 x W320 x D255mm (Model number JBWE70)
81/03318	9/12kg single cabinet - H830 x W330 x D330mm (Model number JBXE83)
81/03317	Single cabinet extended for 5kg CO ₂ - H950 x W445 x D280mm (Model number JBWE95)
81/02961	6kg single cabinet with keylock - H700 x W320 x D255mm (Model number JBKE70)
81/02713	Alarmed single cabinet rotationally moulded - H713 x W328 x D266mm



Jonesco all purpose cabinet

- For storage of extinguisher, fire hose reels breathing apparatus, spill kits
- Wall mountable or free standing
- Plastics locks and key compartment with break-glass facility
- Rubber seal and polycarbonate windows

Part No.	Description
81/02975	All purpose cabinet - H900 x W930 x D420mm (Model number JBKE90)



Jonesco double extinguisher cabinet



- Suitable for 2 extinguishers up to 12kg
- Truck or wall mountable
- 100% PE
- Rubber seal & polycarbonate windows
- Buckle web strap to secure extinguisher

Part No.	Description
81/03311	6kg double cabinet - H720 x W585 x D270mm (Model number JBDE72)
81/03312	9/12kg double cabinet - H850 x W565 x D375mm (Model number JBDE85)
81/02962	6kg double cabinet with keylock - H720 x W585 x D270mm (Model number JBKE72)
81/02947	Alarmed double cabinet rotationally moulded - H713 x W583 x D232mm

Spares for above cabinets

Part No.	Description
81/02960	Spare breakglass
81/03542	Spare latch (pack of 2)
81/03073	Spare key



Jonesco all purpose cabinet

- Suitable for indoor / outdoor storage of hose reel and nozzle
- Ideal for marine layflat hose
- Woven strap to secure contents
- Water resistant seal (can also be used as key cabinet)
- Emergency plan storage box or first aid kit box



Part No.	Description
81/03548	Layflat hose cabinet (Model number Series 56)



Jonesco vehicle extinguisher cabinets

- Strong durable and lightweight
- Truck and trailer mounting
- Internal tension strap to prevent extinguisher from moving
- Flat back for easy mounting

Part No.	Description
81/03313	6kg cabinet top loading - H640 x W250 x D250mm (Model number JBFR64) - Series 64
81/00792	6kg cabinet top loading - H650 x W260 x D275mm (Model number JBFR65) - Series 65
81/00870	9/12kg cabinet top loading - H750 x W300 x D300mm (Model number JBFR75) - Series 75
81/02053	30/60° angled bracket - KIT 55 (A)
81/02327	Horizontal bracket - KIT 56 (B)

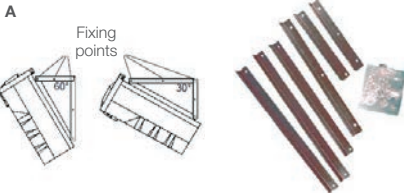

Jonesco vehicle extinguisher cabinets



- Truck or wall mounting
- Neoprene seal
- Detachable lid
- Buckle web strap

Part No.	Description
81/03315	6kg cabinet c/w detachable lid - H680 x W260 x D260mm (Model number JBTE68)



Jonesco vehicle extinguisher cabinets

- Ideal for use in truck cabs, houses, mobile homes etc.
- Detachable lid to immediate access
- Internal sizes H405 x W185mm dia

Part No.	Description
81/03319	Single cabinet for 2kg Powder - H415 x W210 x D145mm (Model number JFEX03)



Jonesco FireKart

- Max combined weight of extinguishers: 30kg
- Made from non-corroding, scratch resistant, UV stable PE - 100% recyclable
- Ideal for petrol forecourts, garages, construction sites, indoor/outdoor festivals, harbours, campsites, etc.
- Extinguisher cradles for stable transport
- Fixing slots to accommodate multiple extinguishers and bracket types, hooks supplied (KIT109)
- Allows for highly visible alarm fitment of various shapes and sizes to the front of the unit
- Base with drainage slot, designed for various fire bucket sizes & shapes
- Solid rubber wheels (Ø 200 mm)
- Optimised centre of gravity - easy to move, pull or push
- Rear design allows to slide unit up/down a step smoothly
- Signage/label area at the top

Part No.	Description
81/03255	FireKart mobile trolley 2 exts 1 bucket



Jonesco fire points

- Suitable for all portable extinguishers
- No corroding parts
- Ideal for public buildings, offices, hotels etc.
- Non-slip design
- Recessed top to accommodate extinguisher

Part No.	Description
81/03320	Single stand - H200 x W345 x D345mm (Model number JFP1)
81/03321	Double stand - H150 x W645 x D320mm (Model number JFP2)




Jonesco extinguisher stands



- Suitable for all portable extinguishers
- No corroding parts
- Ideal for public buildings, offices, hotels etc.
- Non-slip design
- Recessed top to accommodate extinguisher

Part No.	Description
81/03322	Single red fire point stand with back - H750 x W320 x D300mm (Model number JFP3)
81/03323	Double red fire point stand with back - H750 x W620 x D300mm (Model number JFP4) (B)
81/03620	Single grey fire point stand with back - H750 x W320 x D300mm
81/03619	Double grey fire point stand with back - H750 x W620 x D300mm (D)
81/03250	Single red extinguisher stand - flat pack - H645 x W290 x D300mm (Model number JFP9) (C)
81/03251	Double red extinguisher stand - flat pack - H645 x W500 x D300mm (Model number JFP10) (A)
81/03252	Single grey extinguisher stand - flat pack - H645 x W290 x D300mm (Model number JFP9-MG10) (C)
81/03253	Double grey extinguisher stand - flat pack - H645 x W500 x D300mm (Model number JFP10-MG10) (A)
81/03254	CO ₂ extinguisher strap

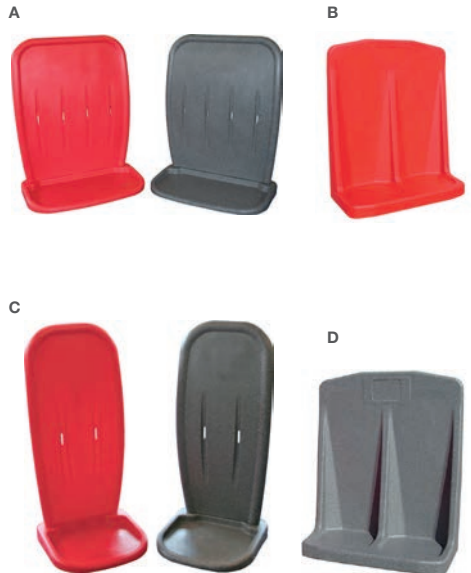

Jonesco fire points with back

- Suitable for 6-9kg Extinguishers (Powder, Foam etc.)
- JFP7 suitable for 2kg CO₂ Extinguishers

Part No.	Description
81/03325	Single fire point stand with back - H620 x W310 x D265mm (Model number JFP8)
81/03324	Double fire point stand suitable for 6ltr & 2kg CO ₂ - H620 x W480 x D265mm (Model number JFP7)
81/03535	Jonesco insert (JFPINSERT) (A)
81/03440	Flat disc insert (B)



Covers

- Manufactured from PVC
- Clear viewing port for extinguisher identification
- Designed for rapid removal

Part No.	Description
81/00106	Red 52cm x 36cm extinguisher cover - Small (3ltr/3kg or smaller)
81/00107	Red 58cm x 34cm extinguisher cover - Medium
81/00108	Red 62cm x 36cm extinguisher cover - Large
81/02393	Red 65cm x 45cm extinguisher cover - XLarge (5kg CO ₂)



Hose reel flexible covers

- Designed to fit most 19mm and 25mm fire hose reels
- Manufactured from strengthened PVC
- Ideal protection in harsh environments
- Easy to fit and rapid removal design

Part No.	Description
46/57354	Hose reel cover red flexible



Hose reel & layflat hose (up to 23m) cradle grp

- Strong GRP construction
- High gloss finish
- Can be mounted in cabinets or to walls (fixings not supplied)
- Will Fit a Layflat Hose

Part No.	Description
46/54225	Hose cradle - H260 x W415 x D175mm



Mobile fire points

- Ideal for moving fire fighting equipment close to the source of a fire
- Chassis fabricated from mild steel tube
- Epoxy polyester powder paint finish in red
- Nylon wheels with rubber tread for ease of movement
- Ideal for petrol station forecourts

Part No.	Description
81/00212	To hold two fire extinguishers and one fire bucket - H1190 x W600 x D420mm. Weight 9.5kg (A)
46/57049	To hold three fire extinguishers and two fire buckets - H1220 x W740 x D300mm. Weight 4.6kg (B)
46/57815	To hold two fire extinguishers complete with bell - H1190 x W600 x D460mm. Weight 13.5kg (C)
81/03512	To hold two fire extinguishers complete with evacuator site alarm (D)



Wheeled contractors mobile fire point

- Chassis fabricated from mild steel round tube
- Epoxy polyester powder coated in red
- Plastic wheels with nylon tyres
- Will accommodate 3 extinguishers, safety signs and manual alarm (not supplied)
- Floor standing with rear wheels for easy moving

Part No.	Description
81/02875	Wheeled contractors mobile fire point (kit form)



Package offer

Part No.	Description
81/03633	Contractors Stand, PowerX 6ltr Foam & 6kg Powder Extinguisher, FirePower 2kg CO ₂ , Powder/Foam/CO ₂ ID Sign, Evacuator Alarm (push button), Fire Action Notice, 11-20 People First Aid Kit



Fire buckets

- Suitable for garage forecourt protection
- Galvanised metal buckets are epoxy polyester powder painted in red
- Fire label supplied loose with metal bucket
- Red plastic bucket with the word 'FIRE' printed on bucket
- Lids for both buckets are supplied separately
- Wall-mounting bracket suitable for metal and plastic buckets

Part No.	Description
3745/00	Metal flat bottom (A)
3747/00	Metal lid for 3745/00 (B)
3745/01	Plastic 2 gallon (10ltr) 'D' type (C)
3747/01	Plastic lid for 3745/01 (D)
3749/00	Wall mounting bracket
81/02709	Sand for bucket 20kg bag (capacity to fill 2 x buckets)



Metal fire document cabinet

Part No.	Description
81/03587	Premium Kentec document box (A4 binder) - includes 2 keys. H310 x W385 x D90mm (C)
F850227N	Spare key for Kentec document cabinet (pack of 2)
81/03588	Red metal fire document cabinet with key lock - includes 2 keys. H370 x W300 x D140mm (B)
81/03589	White metal fire document cabinet with key lock - includes 2 keys. H370 x W300 x D140mm
81/03591	Spare key for red/white document cabinet (pack of 2)
K81/03675	White slimline document cabinet with clipboard inside - includes 2 keys. H390 x W245 x D52mm (A)
81/03629	Red Slimline document Cabinet with clipboard inside - includes 2 keys. H390 x W245 x D52mm (E)
81/03592	Spare key for thin document cabinet (pack of 2)
81/03635	Red material document pouch - H335 x W270mm (G)
81/03264	Budget fire log book unbranded A4 (D)
81/03634	Premium fire log book unbranded A4 binder (F)
K81/03654	Document pouch & budget log book package



Extinguisher theft stopper

- Highly visible 'stop sign' design discourages wrongful use of extinguisher
- Sounds a powerful 98dB at 1 metre when activated
- Self contained 9 V DC alkaline power source is provided
- Tough polycarbonate housing
- Deactivation cable is provided for service by authorised personnel
- Compact design - 136mm dia x 50mm deep

Part No.	Description
81/00534	Extinguisher theft stopper
81/00573	Replacement cable for theft stopper



Mini theft stopper

For free standing and cabinet housed extinguishers

- Highly visible 'stop sign' design discourages wrongful use of extinguisher
- Sounds a powerful 98dB at 1 metre when activated
- Self contained 9 V DC alkaline power source is provided
- Uses magnetic reed switch activation for cabinets and display cases
- Or unique steel contact clip activation for fire extinguisher pins and other free-standing equipment
- Deactivation pin provided for service by authorised personnel
- Tough ABS construction
- Compact design - 83mm dia x 25mm deep

Part No.	Description
81/60004	Mini theft stopper



Safety Signs

3

In this section



40
ID signs



40
Fire fighting equipment



41
Projecting sign



41
General fire



42
Fire action notices




43
Emergency escape




44
Mandatory



44
Prohibition



45
Silicon adhesive & applicator gun



46
Safety posters

Introduction

What the law says

Currently the law for the installation of fire signage is clearly laid out in the Health and Safety (Safety Signs and Signals) Regulations 1996.

In the main this relates to Means of Escape, Fire Action Notices and Fire ID signage.

These regulations endorse the relevant parts of British Standard BS 5499 (Safety Signs).

The requirement for a building's signage should be included in their Fire Risk Assessment. If this is the case, then it is a legal requirement for the building's signage to duly comply.

Viewing distance


The viewing distance of a sign is the maximum distance from which the sign has to be comprehensible.

When calculating size, it should be from the perspective of someone using the primary escape route.

Note, the viewing distance is calculated by the height of the graphical symbol, not the overall height of the signboard itself.

Viewing distance guide

The following guide can be used:

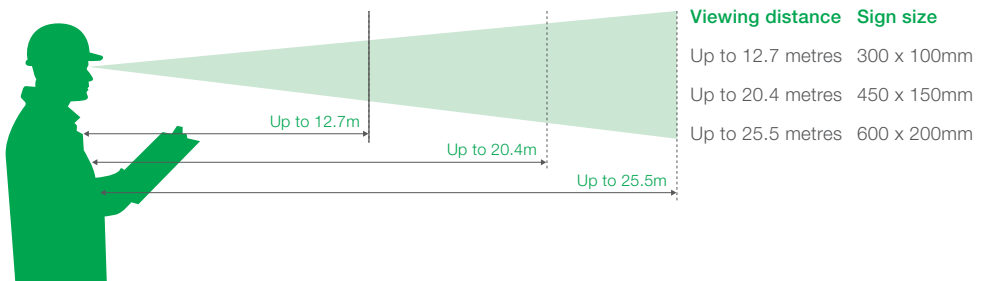

How to order: Choose Your Sign → Choose Material Codes → Choose Size Codes

1 1234 G L

Material

Sign

Size

<ul style="list-style-type: none"> 1 Rigid Plastic 2 Self Adhesive 3 Photoluminescent Rigid Plastic * 5 Miscellaneous Products 6 Aluminium 7 Polycarbonate 	<ul style="list-style-type: none"> A 100 x 75 mm B 80 x 80 mm C 150 x 150 mm D 100 x 150 mm E 200 x 150 mm F 200 x 200 mm G 300 x 100 mm 	<ul style="list-style-type: none"> H 300 x 250 mm J 400 x 200 mm K 400 x 300 mm L 450 x 150 mm M 600 x 200 mm N 400 x 400 mm P 600 x 400 mm 	<ul style="list-style-type: none"> Q 600 x 450 mm R 178 x 203 mm S 200 x 75 mm T 210 x 210 mm U 100 x 100 mm V 300 x 150 mm W 600 x 900 mm X 200 x 100 mm
--	---	--	---

* No size code is required when ordering miscellaneous products

Extinguisher & fire blanket identification signage



CS11235D
CS31235D
CS21235D



CS11236D
CS31236D
CS21236D



CS11214S
CS31214S
CS21214S



CS11215S
CS31215S
CS21215S



CS11216S
CS31216S
CS21216S



CS11217S
CS31217S
CS21217S




CS11231S
CS31231S
CS21217S



CS11218S
CS31218S
CS21218S



CS11237D
CS31237D
CS21237D




CS11233D
CS31233D
CS21233D



CS11234D
CS31234D
CS21234D



CS11246D
CS31246D
CS21246D

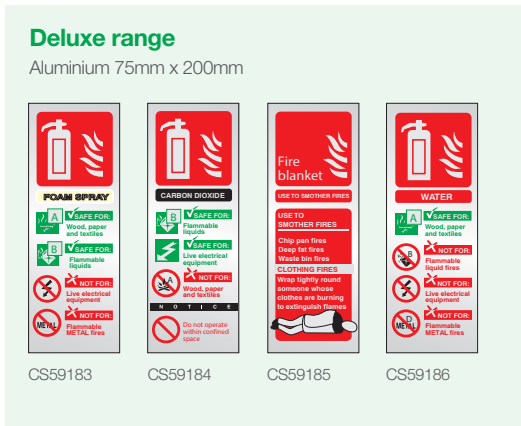

CS59183

CS59184

CS59185

CS59186

Fire fighting equipment



CS11007E
CS11007K



CS11010E
CS11010K



CS11011E
CS11011K



CS11013E
CS11013K




CS11014E
CS11014K



CS11017B CS31017C
CS11017C CS31017U
CS11017U



CS11018U
CS31018U

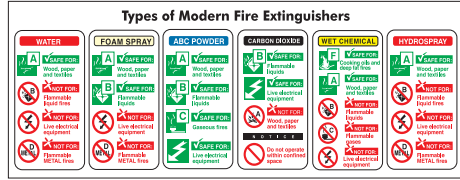

CS11226L

Self adhesive on face 300mm x 50mm



CS58060

Projecting sign in rigid PVC 150mm x 200mm



CS58001



CS58002



CS58003



CS58004

General fire



CS11031X



CS11032E



CS11213E CS3121E

How to order	Choose Your Sign	Choose Material Codes	Choose Size Codes
		1 Rigid Plastic 2 Self Adhesive 3 Photoluminescent Rigid Plastic * 5 Miscellaneous Products 6 Aluminium 7 Polycarbonate * No size code is required when ordering miscellaneous products	(A) 100 x 75 mm (B) 80 x 80 mm (C) 150 x 150 mm (D) 100 x 150 mm (E) 200 x 150 mm (F) 200 x 200 mm (G) 300 x 100 mm (H) 300 x 250 mm (J) 400 x 200 mm (K) 400 x 300 mm (L) 450 x 150 mm (M) 600 x 200 mm (N) 400 x 400 mm (P) 600 x 400 mm (Q) 600 x 450 mm (R) 178 x 203 mm (S) 200 x 75 mm (T) 210 x 210 mm (U) 100 x 100 mm (V) 300 x 150 mm (W) 600 x 900 mm (X) 200 x 100 mm
	1 1234 (G)(L) Material Sign Size		

Fire action notices



CS11405E CS31405E



CS11419E CS31419E




CS11420E CS31420E



CS11428E CS31428E



CS11429E CS31429E



CS11439E CS31439E



Extinguisher visual inspection tag pack of 10
CS58108

Deluxe range

Aluminium 150mm x 200mm



CS59528



CS59538

Emergency escape



CS12001G CS32001G
CS12001L CS32001L



CS12002G CS32002G
CS12002L CS32002L



CS12003G CS32003G
CS12003L CS32003L



CS12004G CS32004G
CS12004L CS32004L



CS12005G CS32005G
CS12005L CS32005L



CS12006G CS32006G
CS12006L CS32006L



CS12007G CS32007G
CS12007L CS32007L



CS12008G CS32008G
CS12008L CS32008L



CS12009G CS32009G
CS12009L CS32009L



CS12010G CS32010G
CS12010L CS32010L



CS12011G CS32011G
CS12011L CS32011L



CS12012G CS32012G
CS12012L CS32012L



CS12013G CS32013G
CS12013L CS32013L



CS12014G CS32014G
CS12014L CS32014L



CS12015G CS32015G
CS12015L CS32015L




CS12016G CS32016G
CS12016L CS32016L



CS12033J CS32033J
CS12033V CS32033V



CS12056J CS32056J
CS12056V CS32056V



CS12142L



CS12059H CS62059Q
CS12059Q



CS12047G CS32047G
CS12047L CS32047L



CS12052G CS32052G
CS12052L CS32052L



CS12143L



CS12062G CS32062G
CS12062L CS32062L



CS58005




CS32034U



CS32037U

How to order	Choose Your Sign	Choose Material Codes	Choose Size Codes
		1 Rigid Plastic 2 Self Adhesive 3 Photoluminescent Rigid Plastic * 5 Miscellaneous Products 6 Aluminium 7 Polycarbonate * No size code is required when ordering miscellaneous products	(A) 100 x 75 mm (B) 80 x 80 mm (C) 150 x 150 mm (D) 100 x 150 mm (E) 200 x 150 mm (F) 200 x 200 mm (G) 300 x 100 mm (H) 300 x 250 mm (J) 400 x 200 mm (K) 400 x 300 mm (L) 450 x 150 mm (M) 600 x 200 mm (N) 400 x 400 mm (P) 600 x 400 mm (Q) 600 x 250 mm (R) 178 x 203 mm (S) 200 x 75 mm (T) 210 x 210 mm (U) 100 x 100 mm (V) 300 x 150 mm (W) 600 x 900 mm (X) 200 x 100 mm

Mandatory



CS51637
Supplied in sheets of 6
each label is 65mm



CS11606B CS31606B
CS11606F CS31606F
CS11606N



CS11618B CS31618B



CS11605F CS11605N



CS11610B CS31610B



CS11609B

Prohibition

A5 Rigid plastic



CS53045

A5 Rigid plastic Pack of 5



CS53060

Silicone sign adhesive

- Ideal for fixing rigid safety signs to most surfaces
- Low modulus silicon adhesive
- Applicator gun supplied separately

Part No.	Description
81/00775	Silicone sign adhesive
81/00774	Applicator Gun For Silicone



How to order	Choose Your Sign	Choose Material Codes	Choose Size Codes
		1 Rigid Plastic 2 Self Adhesive 3 Photoluminescent Rigid Plastic * 5 Miscellaneous Products 6 Aluminium 7 Polycarbonate * No size code is required when ordering miscellaneous products	(A) 100 x 75 mm (B) 80 x 80 mm (C) 150 x 150 mm (D) 100 x 150 mm (E) 200 x 150 mm (F) 200 x 200 mm (G) 300 x 100 mm (H) 300 x 250 mm (J) 400 x 200 mm (K) 400 x 300 mm (L) 450 x 150 mm (M) 600 x 200 mm (N) 400 x 400 mm (O) 600 x 400 mm (P) 600 x 250 mm (Q) 178 x 203 mm (R) 200 x 75 mm (T) 210 x 210 mm (U) 100 x 100 mm (V) 300 x 150 mm (W) 600 x 900 mm (X) 200 x 100 mm
	1 1234 (G)(L)		
	Material Sign Size		


Safety posters

Part No. Description

81/03279	Fire Safety Poster Laminated A2 (A)
81/03280	First Aid For Burns Poster Laminated A2 (B)
81/03281	Electric Shock Poster Laminated A2 (C)
81/03282	Coshh Poster Laminated A2 (D)
81/03283	Workplace First Aid Guide Poster Laminated A2 (E)
CS58112	H&S Law Poster Rigid Plastic (F)
81/03287	H&S Law Poster Flexible Plastic (F)



A



C



F



B



D



E

How to order Choose Your Sign

Choose Material Codes

Choose Size Codes



1 1234 (G) (L)

Material

Sign

Size

- 1 Rigid Plastic
- 2 Self Adhesive
- 3 Photoluminescent Rigid Plastic

- * 5 Miscellaneous Products
- 6 Aluminium
- 7 Polycarbonate

* No size code is required when ordering miscellaneous products

- | | | |
|------------------|------------------|------------------|
| (A) 100 x 75 mm | (H) 300 x 250 mm | (C) 600 x 450 mm |
| (B) 80 x 80 mm | (J) 400 x 200 mm | (R) 178 x 203 mm |
| (C) 150 x 150 mm | (K) 400 x 300 mm | (S) 200 x 75 mm |
| (D) 100 x 150 mm | (L) 450 x 150 mm | (T) 210 x 210 mm |
| (E) 200 x 150 mm | (M) 600 x 200 mm | (U) 100 x 100 mm |
| (F) 200 x 200 mm | (N) 400 x 400 mm | (V) 300 x 150 mm |
| (G) 300 x 100 mm | (P) 600 x 400 mm | (W) 600 x 900 mm |
| | | (X) 200 x 100 mm |

Means Of Escape

4

In this section



49
Redlam panic bolts



49
Key boxes & spares



50
Escape ladder



50
Rotary hand bell



50
Evacuation chair



51
Agrippla door holders
& closers



52
Emergency gas horn &
protection box and fixings



53
Lifehammer



53
Fire triangle



53
Fire door seal



53
Exit stopper



54
Door hardware

Redlam panic bolts

Manufactured from cast aluminium, Redlam panic bolts are the economical solution to the problem of providing reliable security for internal emergency exits.

Mark 1: Designed for emergency exit single doors. Breaking the Ceramtube™ results in the bolt sliding back automatically and unlocking the door.

Mark 2: Designed for interconnecting emergency exit doors. Operates on one side of the door by breaking the Ceramtube™ and on the other side of the door by pushing the knob.

- Both versions are supplied complete with hammer and chain. Padlocks are available separately. Use of an optional padlock prevents unauthorised removal of Ceramtube™ without breaking the tube itself
- Ceramtube™ Replacement cartridges for both Mk I and Mk II Redlam panic bolts are designed to produce no sharp edges when smashed. Packed in boxes of twenty (125mm with +/- 4mm tolerance)

Part No.	Description
46/32207	Panic bolt Mk1
46/32951	Panic bolt Mk2
46/33070	Keeper plate (spare)
39/51921	Hammer and chain (spare)
46/57050	Ceramtube (box of 20)
46/54457	Padlock (anti-tamper) size 1.25"



Key box and glasses

MK1 & MK2

- Manufactured from durable ABS plastic
- Unique 'snap fit' design
- MK1 key box supplied complete with printed glass

Part No.	Description
46/54280	MK1 key box (A)
46/27218	Spare break glass for MK1 key box (glass)
39/51921	Hammer and chain
39/93922	MK2 key box (B)
46/57345	Spare break glass for MK2 key (plastic)



Escape ladders 15 and 25 foot

- Steel ladder, for domestic use only
- Suitable for 2 and 3 storey buildings
- Fully assembled ready for emergency use
- Boxed – will fit under most beds for easy storage
- Simple and quick – attaches to window for escape
- Hooks over window openings
- Metal Rungs

Part No.	Description
466355	Escape ladder - 15 foot
466430	Escape ladder - 25 foot



Rotary hand alarm bell

- Bell sounds 60db alarm at 35 meters
- Die cast aluminium dome powder coated red
- Weight 1.8kg overall dia 280mm and 135mm depth
- Base plate die-cast aluminium

Part No.	Description
42/52030	Rotary hand alarm bell



Evacuation chair

- 4 permanent wheels provide easy manoeuvrability
- Flat seat for superior comfort
- Foot and armrests which aid relaxation of client
- Adjustable padded head cushion offers extra protection
- Rear brakes to secure your position on level ground

Part No.	Description
81/03646	Evacusafe 'Standard' Chair



Agrippa door holders

- Digital sound activated
- Learns the sound of your fire alarm system
- Easy, wire free installation and programming
- Daily timed release option
- 200 N Holding force
- Requires 2 x Alkaline C cell batteries
- Conforms to EN1155 and is CE marked
- Available in 2 x colours

Part No.	Description
81/03668	Agrippa Holder - White
81/03669	Agrippa Holder - Black

 listens
& learns




AGRIPPA

Agrippa door closers

- Battery powered and wire-free
- Fail safe, closing the door upon battery failure
- LED display and low battery warning
- Daily timed release option to close the fire door at night
- Red button on unit to manually close the fire door
- Listens and learns the sound of your specific fire alarm providing greater reliability
- Available in 2 x colour

Part No.	Description
81/03666	Agrippa Closer - Black
81/03667	Agrippa Closer - Brushed Chrome

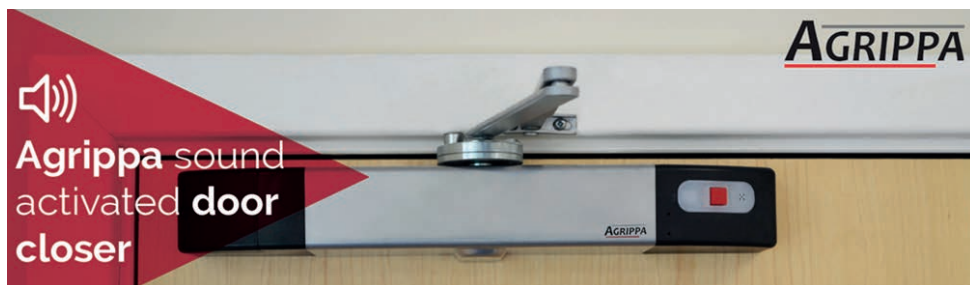

Emergency gas horn

- To attract attention in an emergency fire situation
- Ideal for temporary installations such as construction sites, exhibitions and events
- Supplied in a blister pack for storage and transport
- Maximum 120db
- Sturdy, easy to fix (using 4 x screws)
- Designed to give an Emergency Gas Horn a home
- Makes it easy to identify a missing Gas Horn

Part No.	Description
81/03644	Emergency Gas Horn (A)
81/03684	Emergency Gas Horn Backboard and Clip (B)



Emergency gas horn protection box

- Sturdy plastic box with a translucent cover marked 'Fire Safety Air Horn'
- Includes: a carry handle, two securing clasps and is supplied with a wall mounting bracket
- Enables convenient storage for an Emergency Gas Horn
- The bracket can be mounted on to a wall and the box can be removed as required
- Easy to Fix (using 2 x screws)
- Allows Gas Horn to remain accessible and secure

Part No.	Description
81/03676	Gas Horn Protection Box (A)
81/03683	Emergency Gas Horn Clip (B)



Lifehammer

- Effective emergency escape tool
- Tough pointed double hammerhead combined with sharp protected blade
- Supplied with bracket
- TUV approved
- Breaks auto glass and cuts seat belts
- Overall Tool Size: 175mm length x 68mm width

Part No.	Description
81/03294	Lifehammer



Fire triangle

Made from powder coated steel the alarm triangle with striker is the perfect fire alarm for use when the most cost effective solution is needed ie: camp sites

Part No.	Description
81/03653	Fire Triangle 340 x 340 x 340mm



Fire door seal

- Provides tamper evident protection for boxes, cases, fire exit doors, fire extinguishers and first aid boxes
- Large clear numbers facilitates maintenance checking and identification
- Total length is 228mm with 150mm operational length

Part No.	Description
81/02876	Fire Door Seal Yellow

Exit stopper

- Completely self-contained electronic door alarm
- Highly visible stop sign discourages unauthorised use of emergency doors
- Key operated override facility
- Can be installed on protecting doors in minutes
- Virtually indestructible polycarbonate housing
- Dimensions - 136mm dia x 50mm deep

Part No.	Description
81/03343	Exit Stopper (Single Door Application)



Fire escape hardware

Door closers

- CE and certifier fire and performance tested
- Suitable for use in all applications
- 10 year mechanical warranty
- Finished in stove enamelled silver
- Supplied with easyfix templates and instructions

Part No.	Description
81/03356	Overhead Door Closer Fixed Size 3 to suit doors up to 950mm wide
81/03357	Overhead Door Closer Adjustable Size 2-4 to suit doors up to 1150mm wide



Push pad latch

Tested to BSEN 179/2008


Part No.	Description
81/03367	Push Pad c/w Pullman Latch to BS EN 179



Panic latches

- CE and certifier fire and performance tested
- Tested to BSEN 1125-2008
- 10 year warranty
- Finished in stove enamelled silver
- Supplied with 760mm bar as standard longer bar available
- Push bar panic latch supplied with single and double door strikes
- Rebated push bar to suit rebated double doors

Part No.	Description
81/03363	Contract Push Bar Panic Bolt (complete set)
81/03364	Longer Bar only (Fits XCL / XCB / XLL / XLB) 1100mm - plain bar
81/03365	Contract Push Bar Panic Latch c/w strike (A)
81/03366	Contract Push Bar Panic Latch - C/W vertical rods (B)

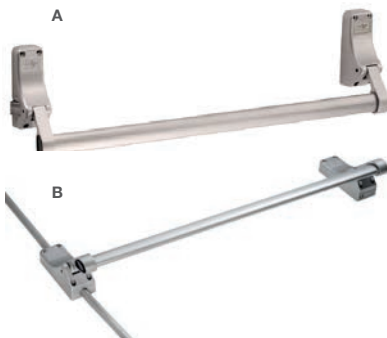

Outside access device

Tested to BSEN 1125-2008

Part No.	Description
81/03368	Outside Access Device c/w Cylinder



Contact us

Get in touch if you need any more information.

We'd be happy to help!

